



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 7/216, H04J 13/04, H04Q 7/20	A1	(11) International Publication Number: WO 97/02668 (43) International Publication Date: 23 January 1997 (23.01.97)
<p>(21) International Application Number: PCT/US96/06682</p> <p>(22) International Filing Date: 10 May 1996 (10.05.96)</p> <p>(30) Priority Data: 08/491,336 30 June 1995 (30.06.95) US</p> <p>(71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p> <p>(72) Inventors: GHOSH, Amitava; 5436 Catlow Valley Road, Fort Worth, TX 76137 (US). ROHANI, Kamyar; 1918 Waterford Drive, Grapevine, TX 76051 (US).</p> <p>(74) Agents: WARREN, Raymond, J. et al.; Motorola Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p>		<p>(81) Designated States: BR, CA, CN, DE, GB, JP, KR, RU, SE.</p> <p>Published <i>With international search report.</i> <i>With amended claims and statement.</i></p>
<p>(54) Title: POWER CONTROL FOR CDMA COMMUNICATION SYSTEMS</p> <p>(57) Abstract</p> <p>A transmitter transmits the desired signal using a continuous duty cycle at transmission rates of less than full rate (Fig. 6). The energy used in each power control group is related to the transmission rate. By repeating the power control groups, time division diversity (Fig. 6) is provided. In the receiver, the received power control groups are analyzed and compared to several levels of energy thresholds (73, 75, 77, 79). The results of the comparisons are converted into a power control signal (74, 76, 78, 80, 81) and returned to the mobile. The mobiles are capable of selecting the appropriate bit (93) and adjusting their power (94). Alternatively, an indicator of the transmission rate can be forwarded (155) in advance of the frame. The receiver compares a power estimate with the threshold for the transmission rate indicated (166).</p> <div data-bbox="938 1140 1364 1701"> <pre> graph TD 71([PCG RECEIVED BY BASE STATION]) --> 72[ENERGY OF PCG IS ESTIMATED] 72 --> 73{IS ESTIMATE ABOVE THRESHOLD ?} 73 -- YES --> 74[SET POWER CONTROL BITS (1,0,0)] 73 -- NO --> 75{IS ESTIMATE ABOVE A SECOND THRESHOLD ?} 75 -- YES --> 76[SET POWER CONTROL BITS (0,1,0)] 75 -- NO --> 77{IS ESTIMATE ABOVE A THIRD THRESHOLD ?} 77 -- YES --> 78[SET POWER CONTROL BITS (0,1,0)] 77 -- NO --> 79{IS ESTIMATE ABOVE A FOURTH THRESHOLD ?} 79 -- YES --> 80[SET POWER CONTROL BITS (0,0,1)] 79 -- NO --> 81[SET POWER CONTROL BITS (0,0,0)] 74 --> 82[INSERT POWER CONTROL BITS INTO NEXT TRANSMISSION] 76 --> 82 78 --> 82 80 --> 82 81 --> 82 82 --> 83([SEND TRANSMISSION TO MOBILE]) </pre> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

-1-

POWER CONTROL FOR CDMA COMMUNICATION SYSTEMS

Field of the Invention

5 The present invention relates, in general, to CDMA (Code Division Multiple Access) communication systems, and more particularly, to power control for CDMA communication systems.

10 Background of the Invention

 The existing CDMA Interim Standard (IS-95 et seq.) was developed by the TIA (Telecommunications Industry Association) and EIA (Electronics Industry Association).
15 In IS-95, when a transmission rate is utilized which is less than the full rate, a discontinuous (burst type) signal is transmitted. This signal is divided into logical frames which are 20 ms (milliseconds) in length. The frames are divided into 16 smaller portions (or
20 slots) which are referred to as power control groups. The base station demodulator estimates the energy of each power control group received from the mobile station. If the energy is above a threshold (E_s) then the base station will send back a power control signal
25 directing the mobile to reduce its transmit power by one step. If the energy is below E_s , then the power control signal will direct the mobile to increase its transmit power by one step. For full rate transmissions, each power control group is used and there is no problem.

30 The problems arise in the transmission rates that are not full rate, such as quarter rate. Presently, a quarter rate transmission will only transmit in a quarter, or four, of the power control groups. There will be nothing related to this transmission transmitted
35 in the remaining twelve power control groups. However,

-2-

the energy of the power control groups that are not used is still measured. This measurement results in the transmission of a power control signal from the base site to the mobile. Currently it is up to the mobile to
5 keep track of which power control groups were used and to ignore power control commands that result from the energy measurement of power control groups that were not used.

The present systems use a bursted duty cycle (i.e.
10 don't use all of the slots in a frame) for transmission of signals at rates other than full rate. Since there is only one threshold power level, in order to have an accurate reading, each burst must meet the same E_s threshold as the continuous full rate transmission.

15

Brief Description of the Drawings

FIG. 1 is a prior art block diagram of a CDMA reverse channel structure;

20 FIG. 2 is a prior art matrix of power control groups by transmission rate;

FIG. 3 is a block diagram of a prior art CDMA forward channel structure;

FIG. 4 is a flow chart of a prior art power control
25 process of a prior art base station;

FIG. 5 is a flow chart of a power control process of a prior art mobile station;

FIG. 6 is a matrix of power control groups by transmission rates as used by the present invention;

30 FIG. 7 is a flow chart of a power control process of a base station utilizing the present invention;

FIG. 8 is a flow chart of a power control process of a mobile station utilizing the present invention;

FIG. 9 is a block diagram of a CDMA reverse channel
35 structure designed to utilize the present invention;

-3-

FIG. 10 is a flow chart of an alternative power control process of a mobile station utilizing the present invention; and

FIG. 11 is a flow chart of an alternative power control process of a base station utilizing the present invention.

Detailed Description of the Drawings

10 Referring initially to FIG. 1, a block diagram of a prior art CDMA reverse channel structure, generally designated 10, is illustrated. This is the design of a mobile station transmitter. The signal to be transmitted is received at block 11 where a frame
15 quality indicator is added to the signal. Next, tail bits are added in block 12. The signal is then convolutionally encoded in block 13 and symbol repetition is performed in block 14. The data is then interleaved (block 15) and modulated (block 16).

20 Next, a data burst randomizer 17 is used to select which of the power control groups will be used for transmission of the signal. Referring to FIG. 2, a matrix, generally designated 29, of the power control groups divided by rate is provided. In the present
25 example, there are sixteen logical power control groups (PCGs) per frame. When a full rate transmission is selected, then all sixteen of the PCGs are used. When a half rate transmission is used, only half of the PCGs are used. As shown, the half of the PCGs that are used
30 is not divided by even or odd numbered PCGs. This is the function of randomizer 17. It randomly selects eight of the 16 PCGs to be used. The same is done for the quarter and eighth rates; the randomizer selects four or two, respectively, PCGs to be used for
35 transmission. It should be noted here that the power

-4-

level used for each PCG, as represented by the height of the block, is the same. Returning now to FIG. 1, a long code generator 18 provides a signal to mixer 19 which is combined with the output from burst randomizer 17. The
5 resulting signal is divided into I and Q components by dividing the signal; up converting by mixing with a 1.2288 MHz (MegaHertz) signal; and delaying the Q signal in delay 23. The I and Q components are then filtered in filters 22 and 24, respectively; and mixed with the
10 cosine and sine of a signal ϕ . The two signals are then combined in summer 27 to provide the signal to be transmitted.

A more detailed description of the operation of the transmitter of FIG. 1 can be found in the TIA/EIA/IS-95
15 beginning at section 6.1.3.

In FIG. 3, a block structure of a CDMA forward channel structure, generally designated 30, is illustrated. Channel structure 30 receives a signal to be transmitted and processes it through much of the same
20 process described with FIG. 1. The signal to be transmitted is modified by adding a frame quality indicator 31 and a tail encoder 32. The signal is further processed by convolutional encoding, symbol repetition, and block interleaving, blocks 33-35. The
25 output of block interleaver 35 is then mixed with a long code which is generated in long code generator 37 and decimated in decimator 38 to reduce it from 1.2288 Mcps (Megacharacters per second) to 19.2 ksps (kilosymbols per second).

30 The mixed signal is then input to multiplexer (MUX) 39 where it is multiplexed with the power control bit. Multiplexer 39 is clocked by the long code which has been further decimated in decimator 40 to 800 Hz. MUX 39 is used to puncture the data stream and insert the
35 power control bit into the signal to be transmitted.

-5-

The signal is then divided and added to an I-Channel PN (PseudoNumber) in adder 41 and to a Q-Channel PN in adder 42. The resulting signals are filtered in filters 43 and 44, respectively. The output from
5 filters 43 and 44 are mixed with the cosine and sine of a signal ϕ , respectively, in mixers 45 and 46. The resulting signals are then summed together in summer 47 to provide the signal (S(t)) to be transmitted.

This signal, when received by the mobile station,
10 is processed; the power control bit is identified; and the mobile station adjusts its power accordingly.

Referring now to the flow chart of FIG. 4, a method of controlling power, generally designated 50, utilized by a prior art base station is illustrated. Method 50
15 commences when a PCG is received by the base station, step 51. In actual implementation, the PCG is all of the signal received by the base station during a particular time period, whether transmitted by a particular mobile station or derived from some other
20 source. The first portion received, first PCG, is then analyzed to estimate the energy (or received power level), step 52.

The energy estimate is then compared to a threshold (E_s) in decision step 53. If the estimate exceeds E_s ,
25 then a down power control bit is inserted in the next transmission to the mobile station, step 54. If the estimate does not exceed E_s , then an up power control bit is inserted in the next transmission to the mobile station, step 55. A transmission containing the power
30 control bit is then transmitted to the mobile.

In FIG. 5, a flow chart of a power control method, generally designated 60, utilized by a prior art mobile station is illustrated. Method 60 begins at step 61 when a transmission is received by the mobile station.
35 The signal is analyzed to recover the power control bit

-6-

transmitted by the base station, step 62. The mobile then determines whether the power control bit was transmitted in response to a PCG burst transmitted by the mobile station, decision step 63. As described

5 above, if the mobile station is transmitting at a rate less than full rate, then not all of the PCGs are used. In that case, the power control bit from the base station may be the result of a PCG that was not used by the mobile. If the PCG was not used by the mobile

10 station, then it should not correct its power based on that measurement by the base station. By having knowledge of the transmission delay times, the mobile has a prior knowledge of the PCG with which the power control bit is associated. If the power control bit is

15 in response to a used PCG, then the mobile station adjusts its power as directed, step 64. If the power control bit is not in response to a utilized PCG, then the power control bit is ignored and method 60 ends, step 65.

20 Referring now to FIG. 6, a matrix, generally designated 68, of power control groups by transmission rate is illustrated. There are two distinctions between the matrix of FIG. 2 and here. The first is that the present invention utilizes every PCG at all of the

25 transmission rates. This is accomplished by the redundant transmission of data. As an example, in the half rate, PCG 1 is transmitted twice, once in 1A and again in 1B. This provides a time diversity which can be utilized by the receiver to increase quality. Due to

30 time diversity the E_b/N_0 (Energy per bit/Noise) is improved which results in improved capacity. As illustrated in matrix 68 and represented by the height of the blocks, the transmission of the half rate PCGs is at half the power of the full rate. The result is that

35 there is no change in the amount of overall energy

-7-

transmitted into the CDMA communication system, but there is an increase in the quality.

In FIG. 7, a flow chart of a method, generally designated 70, of a power control process of a base station utilizing the present invention is illustrated. When a PCG is received by the base station, step 71, the energy is estimated, step 72. The estimate is then compared to a first threshold, decision step 73. This first threshold is the highest threshold and would be the threshold associated with a full rate transmission. If the estimated energy is above the threshold, then the three power control bits are set to a down control (1,0,0), step 74. When this multi-rate power control command is received by a mobile, it will down control its transmit power regardless of the transmission rate. If the estimate is not above the first threshold, it is compared to a second threshold, decision step 75. This second threshold would be the threshold used for a half rate transmission. If the estimate is above the second threshold, then the multi-rate power control command is set to (0,1,0), step 76. This command would direct half, quarter, and eighth rate transmitters to down control the transmission power and a full rate transmitter to up control its transmission power. Process 70 continues for a third threshold (quarter rate transmission), steps 77 and 78, and a fourth threshold (eighth rate transmission), steps 79 and 80. If none of the thresholds is exceeded, then the multi-rate power control command is set to (0,0,0), step 81. When this command is received by a mobile, it will up control its transmit power regardless of the transmission rate. This power control command is then inserted into the next transmission to the mobile station, step 82, and transmitted, step 83.

-8-

In FIG. 8, a flow chart of a power control method, generally designated 90, of a mobile station utilizing the present invention is illustrated. Method 90 begins with the reception of a signal, step 91. The signal is then processed to recover the power control command, step 92. Method 90 then evaluates the power control command, step 93, to determine the relevant action to be taken at its transmission rate. The mobile then adjusts its power as directed by that power control command, step 94, and the process ends until the next signal is received, step 95.

This method allows the operator to avoid the problems involved in using the burst duty cycle by allowing a continuous duty cycle at reduced power. In addition, the repetitive signals afforded by the time diversity of the transmissions provides E_b/N_0 resulting in improved capacity.

Referring now to FIG. 9, a block diagram of a CDMA reverse channel structure, generally designated 100, is illustrated which utilizes the present invention. As with the prior art, the signal to be transmitted is received at block 111 where a frame quality indicator is added to the signal. Next, tail bits are added in block 112. The signal is convolutionally encoded in block 113; and symbol repetition is performed in block 114. The data is then interleaved (115) and modulated (116).

In the present design, the randomizer is no longer needed since all of the PCGs are used for all of the transmission rates. Therefore, the signal resulting from modulator 116 is input directly to mixer 119 where it is mixed with the long code from long code generator 118.

The signal from mixer 119 is divided into I and Q components; up converted by mixing with a 1.2288 MHz (MegaHertz) signal; and delaying the Q signal in delay

-9-

123. The I and Q components are then filtered in filters 122 and 124, respectively; and mixed with the cosine and sine of a signal ϕ . The two signals are then combined in summer 127.

5 The signal from summer 127 is then amplified by an adjustable amplifier 129. Amplifier 129 is adjusted based upon the transmission rate. For full rate, the signal will be output at full power. At half rate, the power will be half-power as represented in the matrix of
10 FIG. 6.

Referring now to FIG. 10, a block diagram of a CDMA forward channel structure, generally designated 130, is illustrated. As with the channel structure of FIG. 3, the signal to be transmitted is modified by adding a
15 frame quality indicator 131 and a tail encoder 132. The signal is further processed by convolutional encoding, symbol repetition, and block interleaving, blocks 133-135. The output of block interleaver 135 is then mixed with a long code which is generated in long code
20 generator 137 and decimated in decimator 138 to reduce it from 1.2288 Mcps (Megacharacters per second) to 19.2 ksps (kilosymbols per second).

The mixed signal is then input to multiplexer (MUX) 139 where it is multiplexed with the four power control
25 bits. Multiplexer 139 is clocked by the long code which has been further decimated in decimator 140 to 800 Hz. Multiplexer 139 is used to puncture the data stream and insert the four power control bits into the signal to be transmitted. Puncturing the forward link with four bits
30 has an insignificant impact on the downlink quality performance. The current IS-95 downlink uses a rate = 1/2 convolutional code punctured at 800 bps (bits per second). This corresponds to a rate of 0.522. In the present proposal, a rate = 1/2 convolutional code
35 punctured at 2400 bps would result in a rate of 0.570.

-10-

Alternatively, the rate information could be sent using a control channel, such as the SACCH (Slow Associated Control CHannel). Another way to reduce the impact of the puncture would be to reduce the number of tail bits
5 from eight bits to six bits.

In FIGS. 11 and 12, an alternative embodiment of a communication system utilizing a method of the present invention is illustrated. In FIG. 11, a flow chart of a method, generally designated 150, of a mobile station
10 utilizing the present invention is provided. Method 150 begins its transmission sequence at step 151. A first frame is processed at a first transmission rate for transmission, step 152, and stored, step 153. A second frame is then processed at a second transmission rate,
15 step 154. An indicator of the second transmission rate is inserted into the first frame, step 155, and the frame is transmitted, step 156. The method then continues, step 157, by inserting indicators of the transmission rate of a subsequent transmission.

20 In FIG. 12, a flow chart of a method, generally designated 160, of a base station utilizing the present invention is provided. Method 160 begins at step 161 when a signal is received. The first frame is received, step 162, and the second transmission rate is
25 determined, step 163, using the indicator. When the second frame is received, step 164, the power of the second frame is estimated, step 165, and compared to the threshold for the second transmission rate, step 166). A power control command can then be determined and
30 returned to the mobile on the next base transmission.

Therefore, a method of operation has been provided which permits the use of a continuous signal at any of the transmission rates through use of a plurality of energy thresholds having lower energy levels for lower
35 rate transmissions.

-11-

While the invention has been described in conjunction with specific embodiments thereof, it is evident that many alterations, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to embrace all such alterations, modifications, and variations in the appended claims.

-12-

Claims

1. A method of controlling power in a CDMA communication system, said method comprising the steps
5 of:
 estimating a received power level of a first portion of a signal being received;
 comparing said received power level with a plurality of threshold power levels;
10 determining a multi-rate power control command based upon the comparison of said received power level with said plurality of threshold power levels; and
 transmitting a power control signal, said power control signal comprising said multi-rate power control
15 command.
2. The method of claim 1 wherein a first portion of said signal is a first power control group.
- 20 3. The method of claim 1 wherein each of said plurality of threshold power levels is associated with one of a plurality of transmission rates.
4. The method of claim 1 further comprising the
25 steps of:
 receiving said power control signal at a mobile station;
 evaluating said multi-rate power control command based on a transmission rate at said mobile station; and
30 adjusting a power level of said mobile station according to said multi-rate power control command.

-13-

5. A method of controlling power (70) in a CDMA communication system, said method comprising the steps of:

receiving, at a mobile station, a power control
5 signal having a multi-rate power control command;
evaluating said multi-rate power control command
based upon a transmission rate of said mobile station;
and
adjusting a transmit power of said mobile station
10 based upon said multi-rate power control command.

6. The method of claim 5 further comprising the steps of:

transmitting, from said mobile station, a
15 continuous signal at a transmission rate;
receiving said continuous signal at a base station;
estimating a received power level of a first
portion of said continuous signal;
comparing said received power level with a
20 plurality of predetermined threshold power levels;
determining a multi-rate power control command
based upon the comparison of said plurality of
predetermined threshold power levels with said received
power level; and
25 transmitting a power control signal from said base
station to said mobile station.

7. The method of claim 6 wherein said
transmission rate of said continuous signal is one of a
30 full rate, a half rate, a quarter rate, and an eighth
rate.

8. The method of claim 7 wherein said first
portion of said signal is a first power control group.
35

-14-

9. A method of controlling power in a CDMA communication system, said method comprising the step of:

- processing, at a first transmission rate, a first
5 frame of a continuous signal to be transmitted from a
mobile station to a base station;
 - storing said first frame of said continuous signal;
 - processing, at a second transmission rate, a second
frame of a continuous signal to be transmitted from said
10 mobile station to said base station;
 - inserting, in said first frame of said continuous
signal, an indicator of said second transmission rate of
said second frame; and
 - transmitting said first frame of said continuous
15 signal.

10. The method of claim 9 further comprising the steps of:

- receiving said first frame of said continuous
20 signal at a base station;
 - determining said second transmission rate from said
indicator in said first frame;
 - receiving said second frame of said continuous
signal at said base station;
 - 25 estimating a received power level of said second
frame of said continuous signal; and
 - comparing said received power level of said second
frame with a threshold power level for said second
transmission rate.

-15-

AMENDED CLAIMS

[received by the International Bureau on 4 November 1996 (04.11.96);
original claims 1-10 replaced by amended claims 1 and 2 (1 page)]

1. A method of controlling power in a CDMA communication system, said method comprising the step of:
 - 5 processing (152), at a first transmission rate, a first frame of a continuous signal to be transmitted from a mobile station to a base station;
storing said first frame of said continuous signal in a mobile station;
 - 10 processing (154), at a second transmission rate, a second frame of a continuous signal to be transmitted from said mobile station to said base station;
inserting (155), in said first frame of said continuous signal, an indicator of said second transmission
 - 15 rate of said second frame, to be used to control power of said CDMA communication system; and
transmitting (156) said first frame of said continuous signal.
- 20 2. The method of claim 1 further comprising the steps of:
 - receiving (162) said first frame of said continuous signal at a base station;
 - determining (163) said second transmission rate from
 - 25 said indicator in said first frame;
receiving (164) said second frame of said continuous signal at said base station;
 - estimating (165) a received power level of said second frame of said continuous signal; and
 - 30 comparing (166) said received power level of said second frame with a threshold power level for said second transmission rate.

- 16 -

STATEMENT UNDER ARTICLE 19

Responsive to the search report which was mailed 4 September 1996, the Applicant hereby provides replacement sheets and an explanation of the differences between the replaced sheets and the replacement sheets. In the following, the bracketed [] material has been deleted and the underlined material has been added to the claims. In each case, the amended claims replace the original claims on the attached replacement sheets.

Claims 1-8 have been canceled and claims 9 and 10 renumbered 1 and 2.

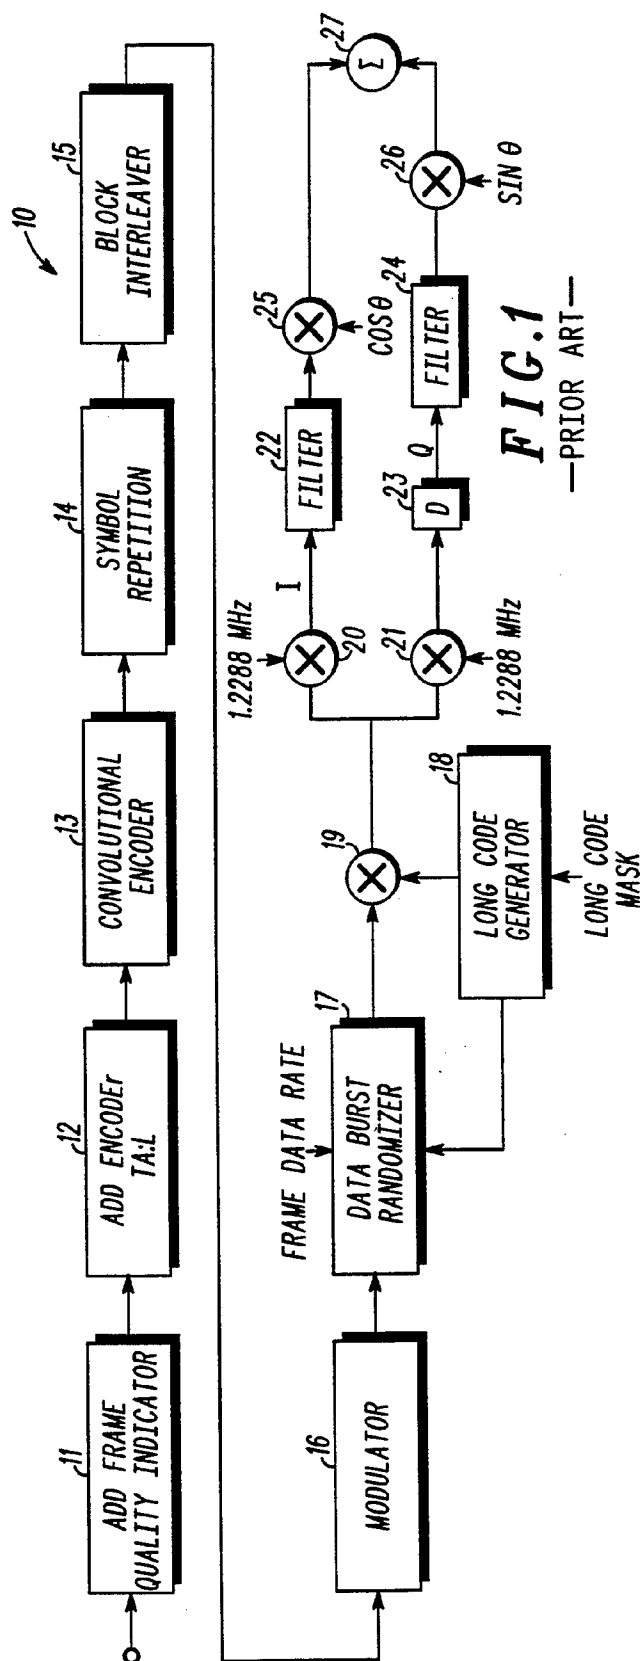


FIG. 2
—PRIOR ART—

	1	2	3	4	5	6	7	...	16
FULL	1	X	X	2	3	X	4	...	X
HALF									
QUARTER	1	X	2	X	X	X	3	...	X
EIGHTH	X	X	1	X	X	X	X	...	2

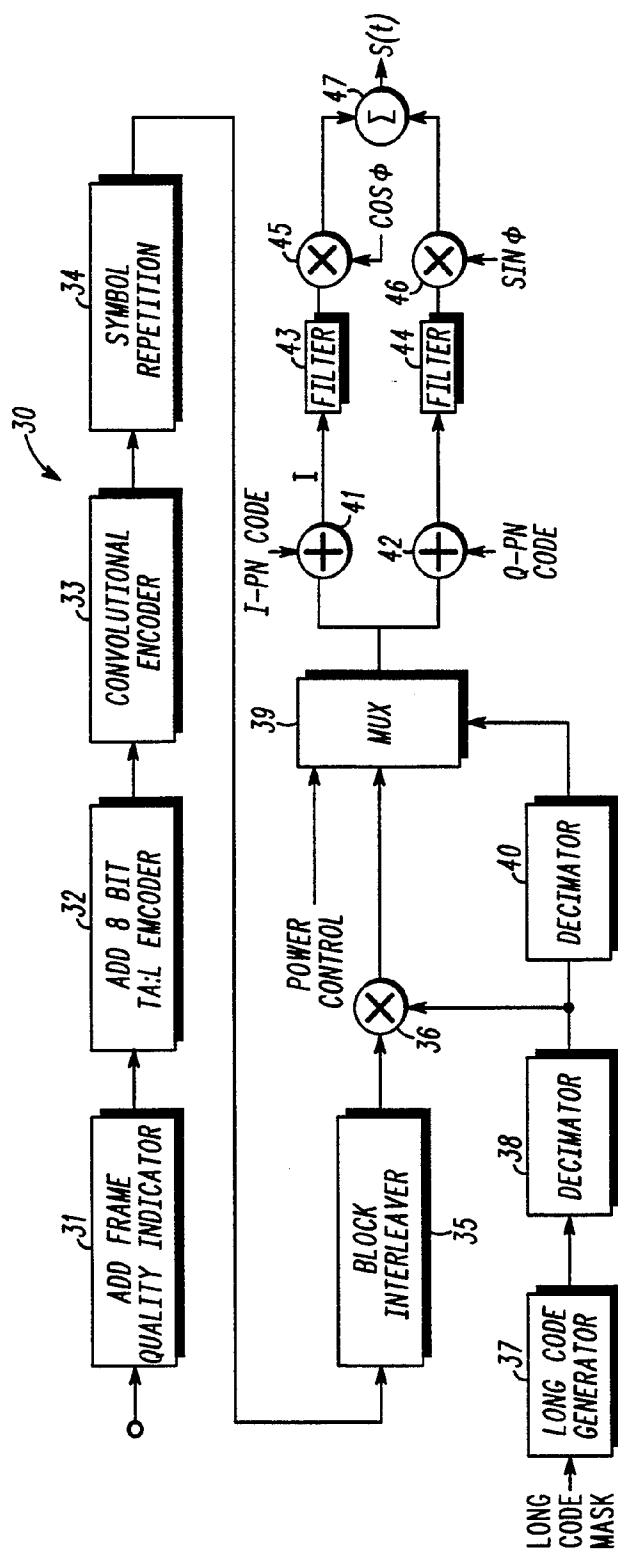


FIG. 3
—PRIOR ART—

3 / 6


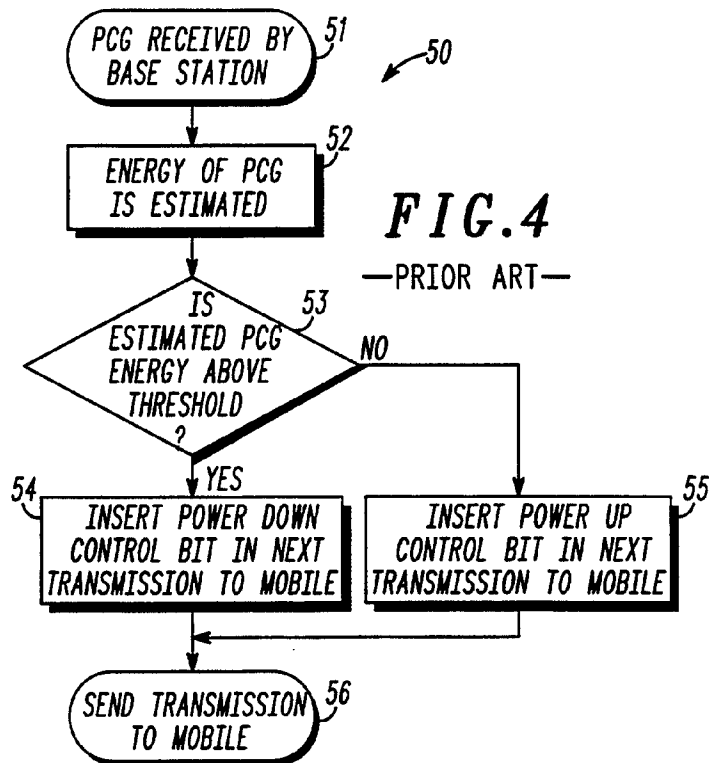


FIG. 5
—PRIOR ART—

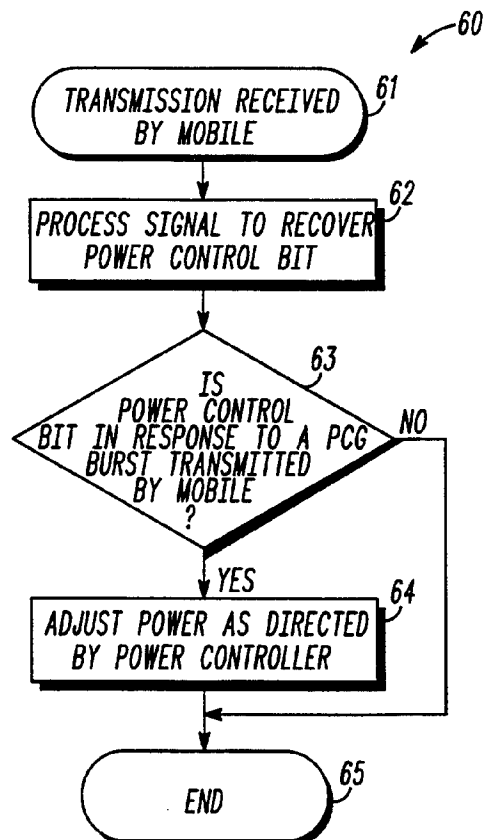


68

POWER CONTROL GROUP											
RATES		1	2	3	4	5	6	7	8	9	16
FULL										 16
HALF											
		1 _A	2 _A	1 _B	3 _A	2 _B	3 _B	4 _A	5 _A	4 _B	8 _B
QUARTER		1 _A	2 _A	1 _B	2 _B	1 _C	3 _A	2 _C	1 _D	3 _B	4 _D
EIGHTH		1 _A	2 _A	1 _B	2 _B	1 _C	2 _C	1 _D	2 _D	1 _E	2 _H
										

FIG.6


5/6

FIG. 7

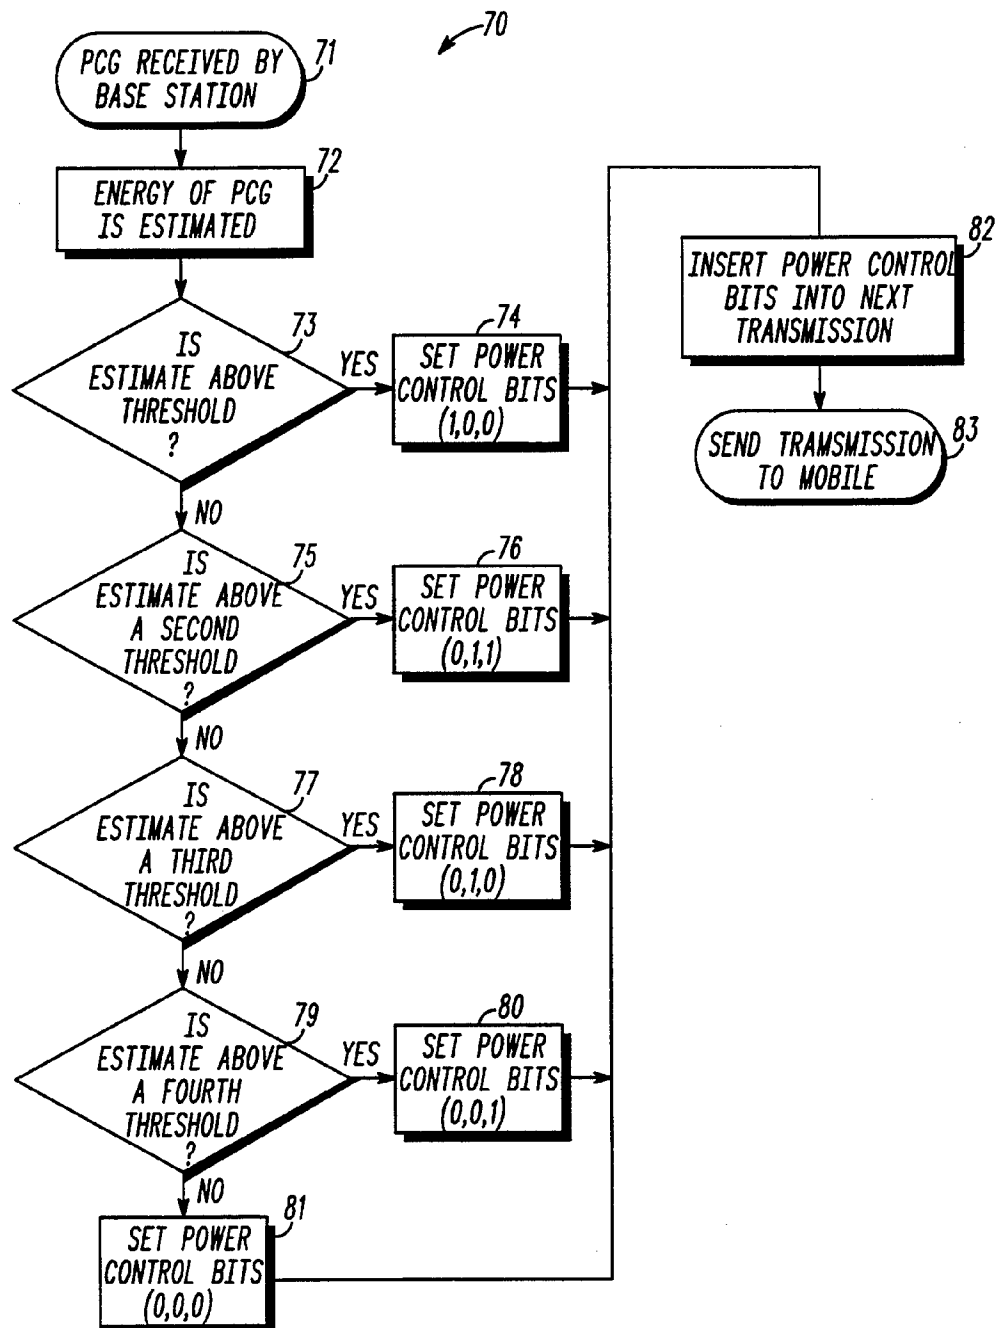

6/6

FIG. 8

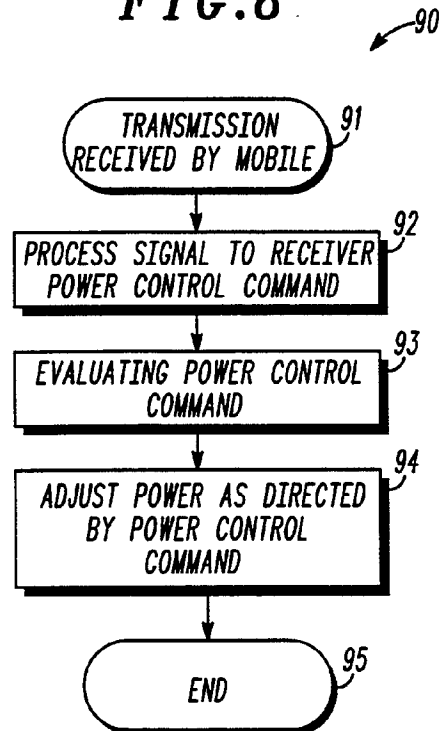

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US96/06682

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04B 7/216; H04J 13/04; H04Q 7/20

US CL : 370/18, 84;

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/18, 84, 110.4, 111; 371/5.1, 5.5; 375/205, 225; 455/38.3, 54.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, E	US, A, 5,528,593 (ENGLISH ET AL.) 18 June 1996, column 5, line 12 through column 6, line 13, column 6, lines 16-18, column 6, line 58 through column 7, line 8, column 7, line 64 through column 8, line 10.	1-10
A	US, A, 5,396,516 (PADOVANI ET AL.) 07 March 1995, see entire document.	1-10
A, P	US, A, 5,511,073 (PADOVANI ET AL.) 23 April 1996, see entire document.	1-10
A, E	US, A, 5,530,716 (LIPA) 25 June 1996, see entire document.	1-10
A	US, A, 5,056,109 (GILHOUSEN ET AL.) 08 October 1991, see entire document	1-10

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

24 JULY 1996

Date of mailing of the international search report

04 SEP 1996

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MIN JUNG

Telephone No. (703) 305-4363

INTERNATIONAL SEARCH REPORT**International application No.**
PCT/US96/06682

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,216,692 (LING) 01 June 1993, see entire document	1-10